

SHP-T GroLux

SHP-TS 250W GROLUX E40 SLV

0020819



Product features

-



PRODUCT OVERVIEW

Lamp finish	clear
Lamp shape	High Pressure Sodium
Colour temperature (K)	2050
CRI (Ra)	20
Dimmable	Yes

SHP-T GroLux

SHP-TS 250W GROLUX E40 SLV

0020819

EAN code	5410288208190
Energy class	A+
Cap/Base	E40
Type	SHP-TS
Watt (Nominal) (W)	265
Light colour	Meat
Ordering number	0020819
Efficacy (Rated) (lm/w)	128
Average life (h) - L70/B50	26000
Luminous flux (Rated) (lm)	34000
Technology	HID

DATA TABLE

Optical data

Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	2050
CRI (Ra)	20
Light colour	Meat
Luminous flux (Nominal) (lm)	34000
Rated lumen maint. factor at 12000 h 50Hz	0.91
Rated lumen maint. factor at 16000 h 50Hz	0.9
Rated lumen maint. factor at 20000 h 50Hz	0.89
Rated lumen maint. factor at 2000 h 50Hz	0.98
Rated lumen maint. factor at 4000 h 50Hz	0.96
Rated lumen maint. factor at 6000 h 50Hz	0.94
Rated lumen maint. factor at 8000 h 50Hz	0.93
Luminous flux (Rated) (lm)	34000

General data

Average life (h) at Ta 25° C	26000
Control gear required	yes
Lamp finish	clear
Lamp shape	High Pressure Sodium
Dimmable	Yes
EAN code	5410288208190

SHP-T GroLux

SHP-TS 250W GROLUX E40 SLV

0020819

Energy class	A+
General application	Logistics and Industry; Outdoor
IEC Reference	IEC 60662
IEC Reference 2	IEC 62035
Intended purpose	General lighting
Cap/Base	E40
Lamp mercury content (mg)	22.7
Type	SHP-TS
Life T90	16000
Ordering number	0020819
Product name	SHP-TS 250W GROLUX E40 SLV
Average life (h) - L70/B50	26000
Rated survival factor at 12000 h 50Hz	0.9
Rated survival factor at 16000 h 50Hz	0.79
Rated survival factor at 20000 h 50Hz	0.66
Rated survival factor at 2000 h 50Hz	1
Rated survival factor at 4000 h 50Hz	0.99
Rated survival factor at 6000 h 50Hz	0.98
Rated survival factor at 8000 h 50Hz	0.97
Special purpose lamp	No
Technology	HID
Transformer required	no
E-number FI	4844460
Photosynthetically active radiation (PAR)	425
Photosynthetic Photon Flux (PPF) (phyto-lm)	75500

Electrical data

Current (A)	2.6
Ignition voltage (V)	0
kWh per 1000 hours burning time	292
Watt (Nominal) (W)	265
Efficacy (Rated) (lm/w)	128
Watt (Rated) (W)	265

Physical data



Max. Lamp Diameter (mm) - D	48
Lamp Length (mm) - C/L	292
Length base to pin Min-Max - B	1153.7-1156.1

SHP-T GroLux

SHP-TS 250W GROLux E40 SLV


0020819

PHOTOMETRY

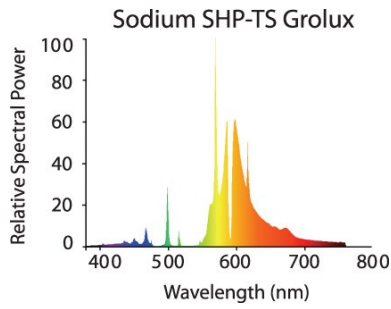


TECHNICAL DRAWINGS

SHP-TS GROLux



SHP-TS GroLux	250W	400W	600W
L	260	292	292
D	48	48	48

E40



SHP-T GroLux

SHP-TS 250W GROLUX E40 SLV

0020819

